


Heat Link[®]

Sidestream Filter #02125

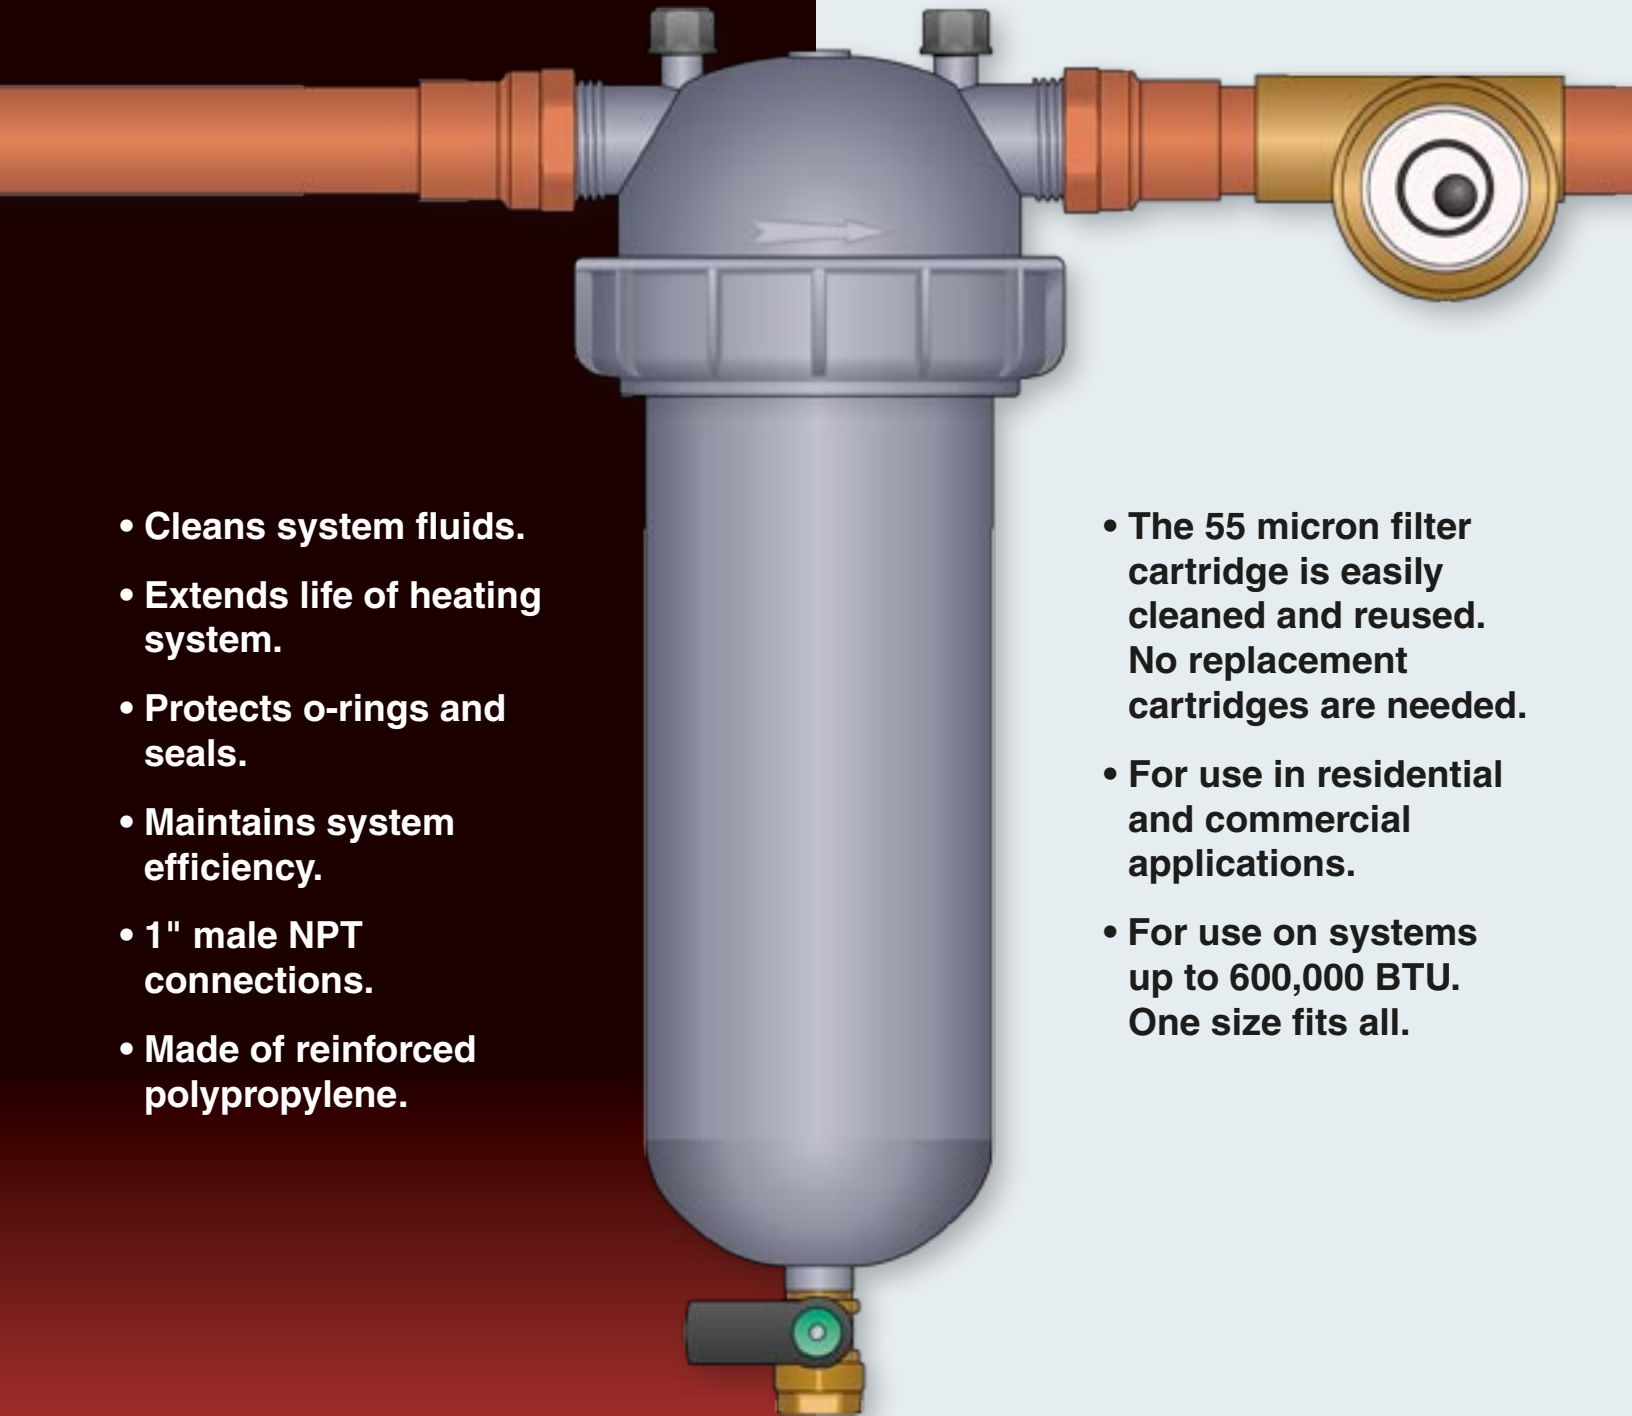

- Cleans system fluids.
- Extends life of heating system.
- Protects o-rings and seals.
- Maintains system efficiency.
- 1" male NPT connections.
- Made of reinforced polypropylene.

- The 55 micron filter cartridge is easily cleaned and reused. No replacement cartridges are needed.
- For use in residential and commercial applications.
- For use on systems up to 600,000 BTU. One size fits all.

Installing a heating system without a HeatLink® filter is no different than designing a car without a fuel filter. Who would want to drive it?

Similar to the fuel filter in your car, a HeatLink® filter provides insurance against component degradation by removing precipitates (solids suspended in the system fluids) that become trapped in your heating system. The removal of these impurities extends the life expectancy of your heating system.

Precipitates can lead to damage and leaks in O-rings and seals by increasing the wear and tear on these components. They also increase the risk of galvanic corrosion, and build up on the interior of the metal piping and boiler. The result is a decrease in the efficiency of heat transfer.


The 55 micron HeatLink® filter is a column of stacked disks designed to remove precipitates as water passes through. Made of reinforced polypropylene, it is chemically resistant to propylene and ethylene glycol and both molybdate and nitrate inhibitors. This filter is recommended for both residential and commercial applications, for systems up to 600,000 BTU. It uses 1" male NPT connections, and one size fits all.

There are no replacement filter cartridges to buy, as the disk system is easily removed, cleaned under a stream of warm water, and simply reinserted. The simple addition of a flow indicator to the outlet of the filter informs the operator that the filter needs cleaning.

All cars come with fuel filters to increase their efficiency and longevity, and a HeatLink® filter will do the same for your heating system.




Pressure Loss Chart

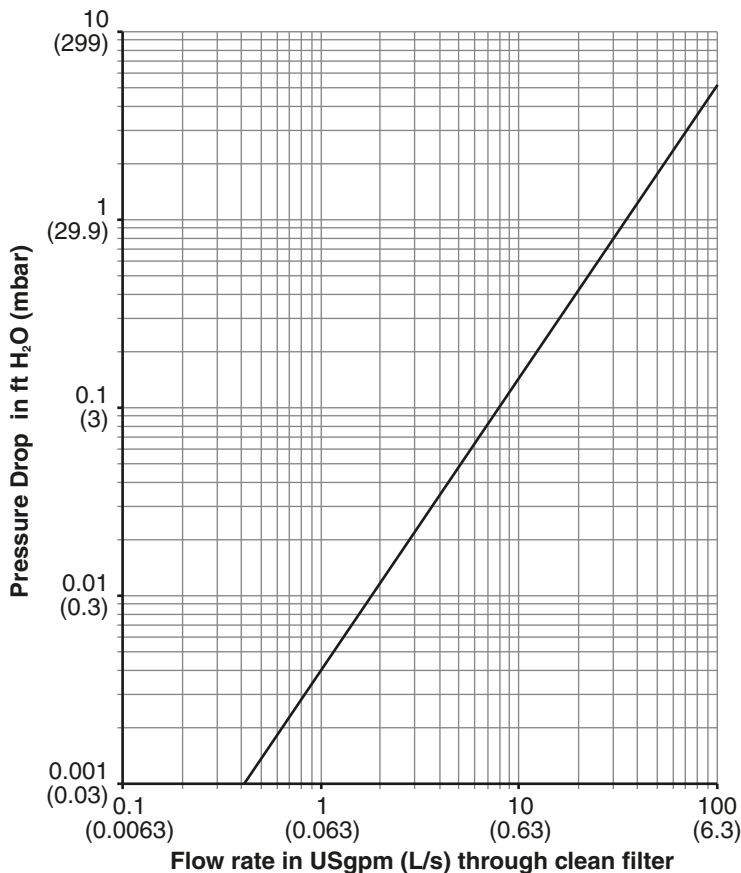


Maximum operating temperature = 158°F (70°C)

Recommended Installation Methods

- install on low temperature circuit
- requires additional 5-10% volume flow which is to be directed through filter
- valves mandatory
- method 2 is specifically for use with the mixing block

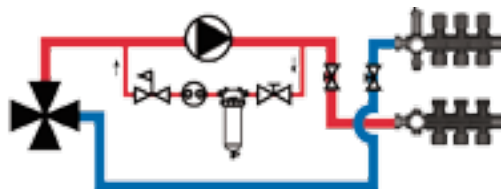

Method 1

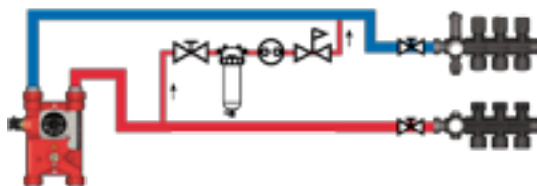

Method 2

| Legend: | |
|---------|--------------------------|
| | sidestream filter #02125 |
| | isolation (ball) valve |
| | balancing valve |
| | flow indicator |

© HeatLink Group Inc. HeatLink is a registered trademarks of HeatLink Group Inc.

Heat Link Canada

Manufactured & Distributed by HeatLink Group Inc.
Head Office:
 4603E - 13th Street NE
 Calgary, AB, T2E 6M3
 Toll Free: 1-800-661-5332 Phone: (403) 250-3432
 Fax: 1-866-450-1155
Mississauga Office:
 1555 Bonhill Road, Unit #7
 Mississauga, ON, L5T 1Y5
 Toll Free: 1-800-661-5332 Phone: (905) 795-8289
 Fax: 1-866-450-1155

Heat Link China

Distributed by Cathay-Links International
 Phone: 852-25693213
 Fax: 852-25359271

Heat Link Ireland

Distributed by Jamoni Ltd.
 Phone: 057 - 932 4062
 Fax: 057 - 932 4063
 Free Phone: 1800-311338

Heat Link Mexico

Distributed by Distribuidora Caisa S.A. de C.V.
 Phone: (52) 3300-4400
 Fax: (52) 3300-4406

Heat Link USA

Distributed by HeatLink Group Inc.
 Toll Free: 1-800-661-5332
 Fax: 1-800-869-6098

www.heatlinkgroup.com